



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60 100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

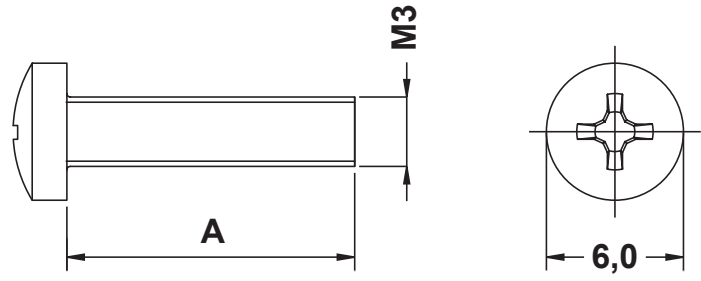

P/N	A
10320AA0004.0	4.0
10320AA0005.0	5.0
10320AA0006.0	6.0
10320AA0008.0	8.0
10320AA0010.0	10.0
10320AA0012.0	12.0
10320AA0014.0	14.0
10320AA0016.0	16.0
10320AA0018.0	18.0
10320AA0020.0	20.0
10320AA0022.0	22.0
10320AA0025.0	25.0
10320AA0028.0	28.0
10320AA0030.0	30.0

OPERATING TEMPERATURE: -30° C ~ + 100° C
ESTIMATE ACCORDING: DIN 7985 (~ DIN 34812) , ISO 7045

		TITLE RECESSED PAN SCREW WITH CROSS RECESS DIN34812	
		MATERIAL PA6	DATE 28/04/2021
		COLOR NATURAL	DRAWN R.F.
PART NUMBER SEE TABLE		DRAWING NUMBER 21.04.28.10320.0.E	
SIZE A4	SCALE NTS	UNIT mm	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE			CHECK APPROVED