


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0



REVISIONS			
REV	DESCRIPTION	DATE	BY

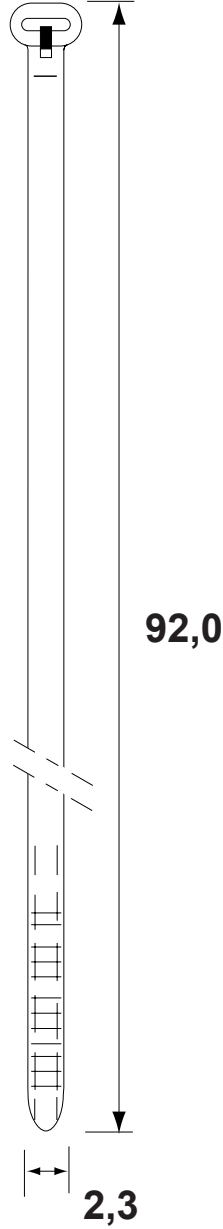

**NOTES:**  
**UV RESISTANT**  
**HALOGEN AND SILICON FREE**  
**THICKNESS: 1,0**  
**MAXIMUM BUNDLE DIAMETER: 22,0**  
**TENSILE STRENGTH 80 N**  
**WORKING TEMPERATURE -60° ...+85°C**

**MATERIAL:**  
**BODY PP HB(UL94)**  
**BARB 316 STAINLESS STEEL**

DESCRIPTION		TITLE: <b>RELEASABLE CABLE TIES</b>		DWG UNIT: MM	
MATERIAL: SEE ABOVE		Modelled in RHINO 4.0 FILE:		DwN: 23.0516.18372X	ChkD:
COLOUR: BLACK		TOLLERANCES UNLESS NOTED	SHEET: 1 OF 1	DT: 16/05/23	Part Number: 18372FA01
		SEE ABOVE	SCALE: NTS		
REV.	DATE				