


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

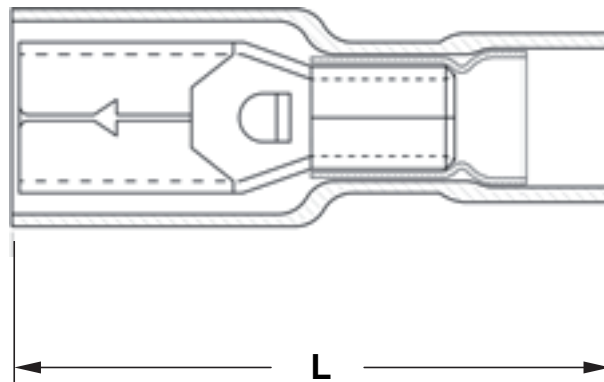

	SECTION mm ²	Ø	L	COLOR
16603CA08	0,5-1,5	4,0	23,3	BLUE
16598CA06	1,5-2,5	5,0	23,3	YELLOW
16600CA04	4,0-6,0	5,0	25,1	RED

NOTES:

TERMINAL MATERIAL: CU-ETP 99.9% TIN-PLATED COPPER

ISOLATION: PVC

RATED VOLTAGE: 300V MAX.

WORKING TEMPERATURE: 75°C MAX.

				TITLE INSULATED FEMALE DISCONNECTORS	
				MATERIAL SEE ABOVE	
PART NUMBER SEE TABLE				DRAWN A.C.	
				DRAWING NUMBER 22.07.07.16XXX.0.E	
SIZE A4		SCALE NTS		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
UNIT mm.		REV A		APPROVED	