
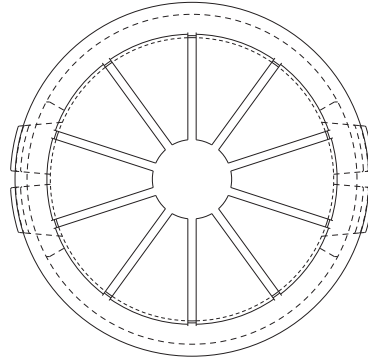


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

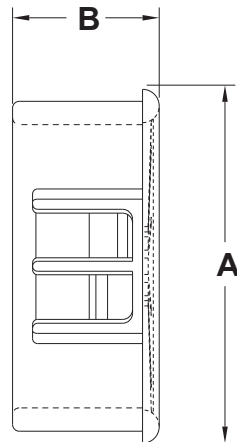

P/N	MOUNTING HOLE	Ø CABLE	A	B	PANEL
15250AA01	Ø 12,7	Ø 7,6	14,2	9,8	3,2
15251AA01	Ø15,9	Ø 11,1	17,5	10,3	3,2
15252AA01	Ø 19,1	Ø 12,7	20,3	10,3	3,2
15253AA01	Ø 22,2	Ø 14,3	23,4	10,3	3,2
15254AA01	Ø 25,4	Ø 19,1	26,7	10,3	3,2
15255AA01	Ø 27,8	Ø 20,6	29,5	10,3	3,2
15256AA01	Ø 31,8	Ø 23,8	36,6	10,3	3,2
15257AA01	Ø 34,9	Ø 25,4	36,6	10,3	3,2
15258AA01	Ø 38,1	Ø 26,9	39,6	10,7	3,2
18461AA01	Ø 50,8	Ø 41,7	53,9	10,7	3,2
18462AA01	Ø 50,8	Ø 43,2	66,0	18,3	6,4

WORKING TEMPERATURE: -18°C....+105°C

		TITLE <b>OPEN/CLOSED UNIVERSAL BUSHINGS</b>		
		MATERIAL PA 6.6 V2(UL94)	DATE 24/07/2023	
PART NUMBER SEE ABOVE		DRAWING NUMBER 23/07/24.1525.X.E	COLOR BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE
				APPROVED