
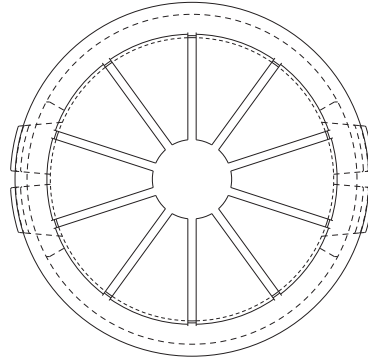


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

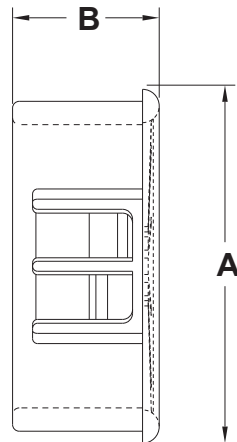

P/N	MOUNTING HOLE	Ø CABLE	A	B	PANEL
17642AA01	Ø 12,7	Ø 7,6	15,2	9,8	3,2
17701AA01	Ø22,2	Ø 14,3	23,8	11,5	3,2
17643AA01	Ø 30,2	Ø 24,1	31,8	11,5	3,2
17644AA01	Ø 31,8	Ø 25,8	33,4	11,5	3,2
17645AA01	Ø 34,9	Ø 25,8	44,5	11,5	3,2
17646AA01	Ø 44,5	Ø 34,9	47,5	11,8	3,2
17647AA01	Ø 50,8	Ø 41,6	54,0	12,4	3,2
17648AA01	Ø 63,5	Ø 50,0	66,8	19,05	6,4
17649AA01	Ø 76,2	Ø 62,7	80,0	19,05	6,4

WORKING TEMPERATURE: -18°C....+105°C

PANEL THICKNESS UP TO 3,2

		TITLE SNUB BUSHING		
		MATERIAL PA 6.6 V2(UL94)	DATE 18/07/2023	
PART NUMBER SEE ABOVE		DRAWING NUMBER 23/07/18.1764.X.E	COLOR BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE
				APPROVED