




REVISIONS

REV	DESCRIPTION	DATE	BY

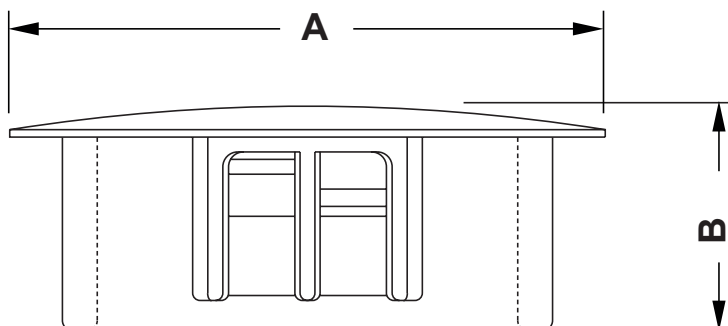

UV RESISTANT

WORKING TEMPERATURE: -40°C....+105°C

HALOGEN AND PHOSPHORUS FREE

P/N	A	B	MOUNTING HOLE Ø	MAX. THICKNESS
18483AR01	6,4	14,3	4,7	1,6
18484AR01	7,9	13,2	6,4	1,6
18485AR01	9,5	13,2	7,9	1,6
18486AR01	14,7	14,3	12,7	6,4
18487AR01	18,5	13,2	15,9	6,4
18488AR01	23,1	13,2	19,1	6,4
18489AR01	25,8	14,3	22,2	6,4
18490AR01	30,6	14,3	25,4	6,4
18491AR01	30,9	14,3	27,8 - 28,6	6,4
18492AR01	34,9	14,3	31,7	6,4
18493AR01	38,1	14,3	34,9	6,4
18494AR01	42,4	14,3	38,1	6,4
18495AR01	48,4	14,3	44,5	6,4
18496AR01	55,1	14,7	50,8	6,4



		TITLE HOLE PLUGS			
		MATERIAL PA6.6 V0 (UL94)	DATE 03/08/2023		
		COLOR BLACK	DRAWN A.C.		
PART NUMBER SEE TABLE	DRAWING NUMBER 23.08.03.184X.0.E	CHECK			
SIZE A4	SCALE NTS	UNIT mm	REV B	UNLESS OTHERWISE SPECIFIED TOLERANCE	APPROVED