




DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0



REVISIONS			
REV	DESCRIPTION	DATE	BY



MOUNTING HOLE

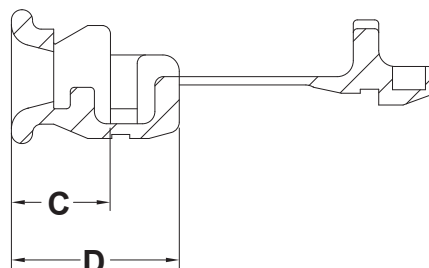

P/N	A	B	C	D	APPROX. CABLE DIAMETER	THICKNESS	COLOR
18526AA01	9,5	8,4	9,5	15,9	Ø 2,3 - 4,6 Ø 2,8 - 5,3	1,6	BLACK
18526AA02	9,5	8,4	9,5	15,9	Ø 2,3 - 4,6 Ø 2,8 - 5,3	1,6	WHITE
18527AA01	11,1	9,9	9,5	15,9	Ø 3,0 - 7,6	1,6	BLACK
18527AA02	11,1	9,9	9,5	15,9	Ø 3,0 - 7,6	1,6	WHITE
18528AA01	12,7 - 13,1	11,8	10,3	17,9	Ø 3,0-7,6	3,2	BLACK
18528AA02	12,7 - 13,1	11,8	10,3	17,9	Ø 3,0 - 7,6	3,2	WHITE
18529AA01	12,7 - 13,5	11,4	10,3	17,5	Ø 6,3-7,6	1,6	BLACK
18529AA02	12,7 - 13,5	11,4	10,3	17,5	Ø 6,3-7,6	1,6	WHITE
17926AA01	15,9	14,0	10,7	20,7	Ø 8,2 - 9,1	3,2	BLACK
17926AA02	15,9	14,0	10,7	20,7	Ø 8,2 - 9,1	3,2	WHITE
8331AA01	15,9	14,0	10,7	20,7	Ø 8,2 - 9,1	1,6	BLACK
8331AA02	15,9	14,0	10,7	20,7	Ø 8,2 - 9,1	1,6	WHITE
18530AA01	15,9	14,0	10,7	20,7	Ø 7,6	3,2	BLACK
18530AA02	15,9	14,0	10,7	20,7	Ø 7,6	3,2	WHITE
18531AA01	15,9	14,0	10,7	20,7	Ø 3,8 - 10,4	3,2	BLACK
18531AA02	15,9	14,0	10,7	20,7	Ø 3,8 - 10,4	3,2	WHITE
18532AA01	15,9	14,0	10,7	20,7	Ø 8,0 - 8,1	3,2	BLACK
18532AA02	15,9	14,0	10,7	20,7	Ø 8,0 - 8,1	3,2	WHITE

WORKING TEMPERATURE: -18°C.....+105°C

				TITLE STRAIN RELIEF BUSHINGS			
				MATERIAL PA66 V2 (UL94)		DATE 05/09/2023	
PART NUMBER SEE TABLE		DRAWING NUMBER 23.09.5.185.0.E		COLOR SEE ABOVE		CHECK	
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	