


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

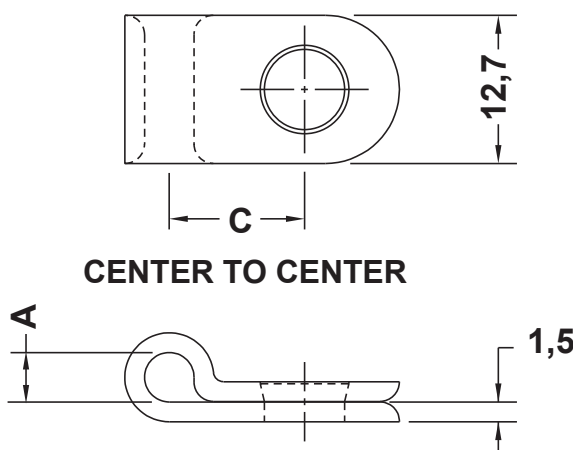

P/N	MOUNTING HOLE	SCREW	A	C
12600AA00	5,2	10	3,2	9,4
12601AA00	5,2	10	4,7	10,4
12602AA00	5,2	10	6,3	11,2
12603AA00	5,2	10	7,9	12,2
12604AA00	5,2	10	9,5	13,0
12605AA00	5,2	10	11,1	13,7
12606AA00	5,2	10	12,7	14,7
12607AA00	5,2	10	14,3	15,5
12608AA00	5,2	10	15,9	16,5
12609AA00	5,2	10	17,4	17,3
12610AA00	5,2	10	19,1	18,0
12611AA00	5,2	10	20,6	19,1
12612AA00	5,2	10	22,2	19,8
12613AA00	5,2	10	25,4	21,6
12614AA00	5,2	10	28,6	23,4
12615AA00	5,2	10	30,1	24,1
12616AA00	5,2	10	31,8	25,1
12617AA00	5,2	10	34,9	26,7
12618AA00	5,2	10	38,1	28,4

**NOTES:**

WORKING TEMPERATURE: - 0°C ~ +85°C  
ON SPECIAL REQUEST AVAILABLE IN BLACK COLOUR

		TITLE <b>CABLE CLAMPS</b>	
		MATERIAL PA 66 V2(UL94)	DATE 17/04/2018
		DRAWN R.F.	
PART NUMBER SEE TABLE		DRAWING NUMBER 18.04.17.126XX.0.E	
COLOR NATURAL		CHECK	
SIZE A4	SCALE NTS	UNIT mm	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	