


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

P/N	A	B	MAX. BUNDLE Ø	TENSILE STRENGTH N
18197AA08	92,0	2,4	2,0-16,0	80
18198AA08	140,0	3,6	2,0-29,0	134
18199AA08	186,0	4,8	3,5-45,0	220
18200AA08	360,0	4,8	3,5-102,0	220
18201AA08	340,0	7,0	6,0-90,0	540

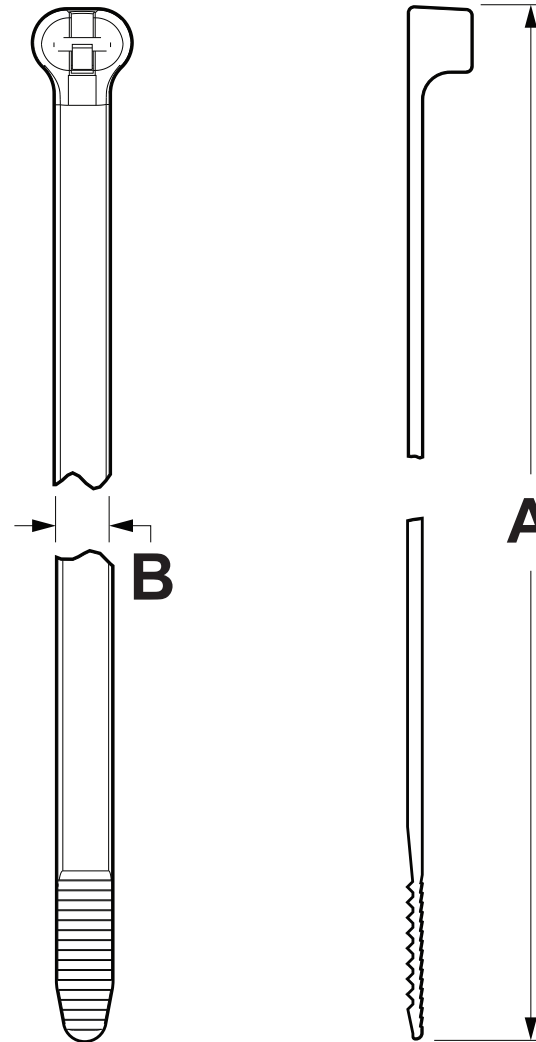

NOTES:

HALOGEN AND SILICON FREE
WORKING TEMPERATURE -40° ...+85°C

MATERIAL:
BODY PA 6.6 V2(UL94)
BARB 316 STAINLESS STEEL

DESCRIPTION		TITLE: DETECTABLE CABLE TIES		DWG UNIT: MM	
MATERIAL: SEE ABOVE		Modelled in RHINO 4.0 FILE:		DwN: 22.07.21.181X.E.0 ChkD:	
COLOUR: BLUE		TOLLERANCES UNLESS NOTED		DT: 21/07/22 Part Number: SEE TABLE	
		SEE ABOVE		SHEET: 1 OF 1	
				SCALE: NTS	
REV.	DATE				